

EOS Water mill sauna

With EOS Stone S60 sauna heater – for spectacular sauna infusions.

The unique combination for dry Finnish sauna with powerful event infusions.

The special highlight is the stylish mill wheel, which constantly rotates anti-clockwise during operation. Upon a manual or an automatic signal it starts to rotate in the reverse direction and pours the water several times into the cascade directly over the heater, which creates a series of powerful, impressive steam shocks.

With EOS Stone S60 – luxury class sauna heater with soapstone panels on the front side. Watermill wheel with anthracite finish and stainless steel scoops.

Your advantages:

- Exclusive design – stylish mill wheel with a unique function for spectacular event infusions.
- With exclusive luxury class sauna heater EOS Stone S60.
- Durable, long-lasting construction, all made of stainless steel
- Programmed time intervals, e.g. every 30 minutes.
- Automatic water refilling via built-in fixed water connection.
- 60 kg stone volume for top performance.
- Made in Germany quality from EOS.


Specifications:

Sauna heater:	EOS Stone S60 <i>see data sheet Stone S60</i>
Power range:	9.0, 12.0 and 15.0 kW
Power supply:	400 V 3N ~ 50 Hz
Water mill:	Completely pre-assembled, water tank with automatic water refilling
Dimensions (HxWxD):	150 x 80 x 91 cm (mill + heater)
Water connection:	3/4" cold water supply
Power supply:	230 V 1N ~ 50 Hz (1 x 16A)




Connection diagram


9,0 kW

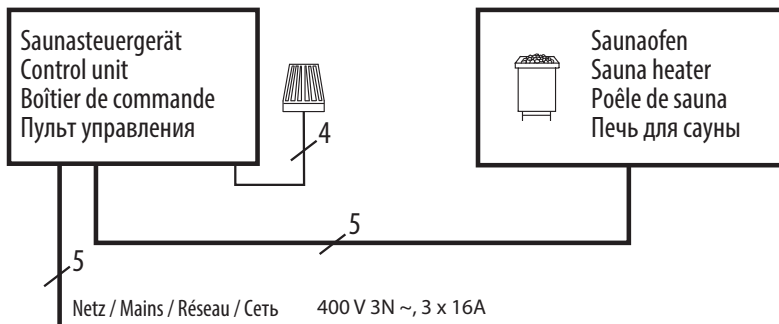

12,0 -15,0 kW

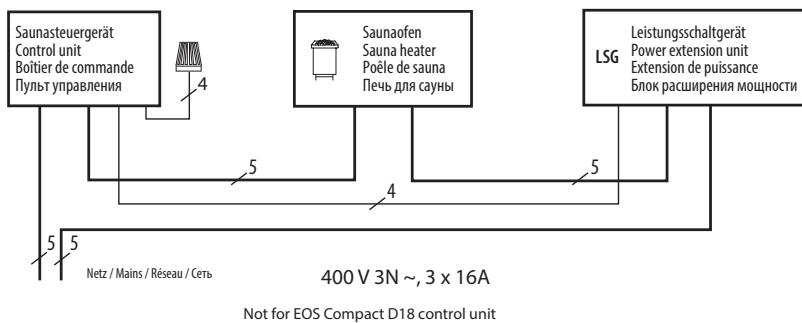

Minimum clearances

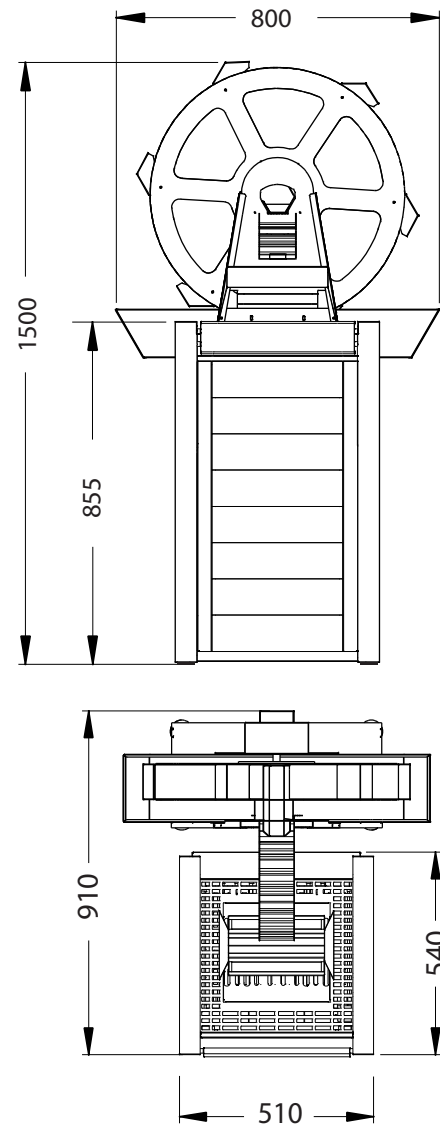

Technical specifications

Power output	Electrical connection	Connection mains - control unit	Connection control unit - heater	Connection mains - LSG	Connection LSG - heater	Connection control unit - LSG unit
9.0 kW	400 V 3N ~ 50 Hz	5 x 2,5 mm ²	5 x 1,5 mm ²	--	--	--
12.0 kW				5 x 2,5 mm ²	5 x 1,5 mm ²	4 x 1,5 mm ²
15.0 kW				5 x 2,5 mm ²	5 x 1,5 mm ²	4 x 1,5 mm ²

All cross sections of a line are minimum diameters in mm² (copper wire).

Item no.	Power output	Fuse protection control unit	Fuse protection LSG unit	Dimensions H/W/D, in cm	For sauna cabin size	Min. size of air inlet and outlet	Weight without rocks	Stone filling	Power extension required	Suitable control units
94 5294	9.0 kW	Sauna heater: 3 x 16 A Mill wheel: 1 x 16 A	--	Sauna heater: 85 / 51 / 53 Mill + heater: 150 / 80 / 91	9 - 14 m ³	35 x 6 cm	78 kg	60 kg	--	EOS Econ D-, Compact D-, EmoTec D-, EmoStyle D-/Hi-, EmoTouch 3 series
94 5295	12.0 kW		3 x 16 A		14 - 18 m ³	35 x 7 cm				
94 5296	15.0 kW		3 x 16 A		18 - 25 m ³	35 x 9 cm			LSG 10	

Note: No additional LSG unit is required for EOS Compact D18 control units. EOS Econ D1 – only for 9 kW models.